


SOBRITE FILTERMATIC² RECLAIM SYSTEM - 30 SERIES DUAL SKID

TYPICAL 4-TANK RECLAIM LAYOUT -
2,000 GAL. PRECAST CONCRETE TANKS



- NOTES:**
- All tank crossover connections must be at least 6" & capable of handling at least 200 GPM.
 - All tank inlets & crossover connections must have tees.
 - TANK A will have a bushing to reduce the flow back into TANK B. This flow will be adjusted upon car wash startup.
 - TANKS C & D will require 1" electrical conduits for control circuits back to the reclaim system. Place the junction boxes inside each tank neck above the maximum water level.

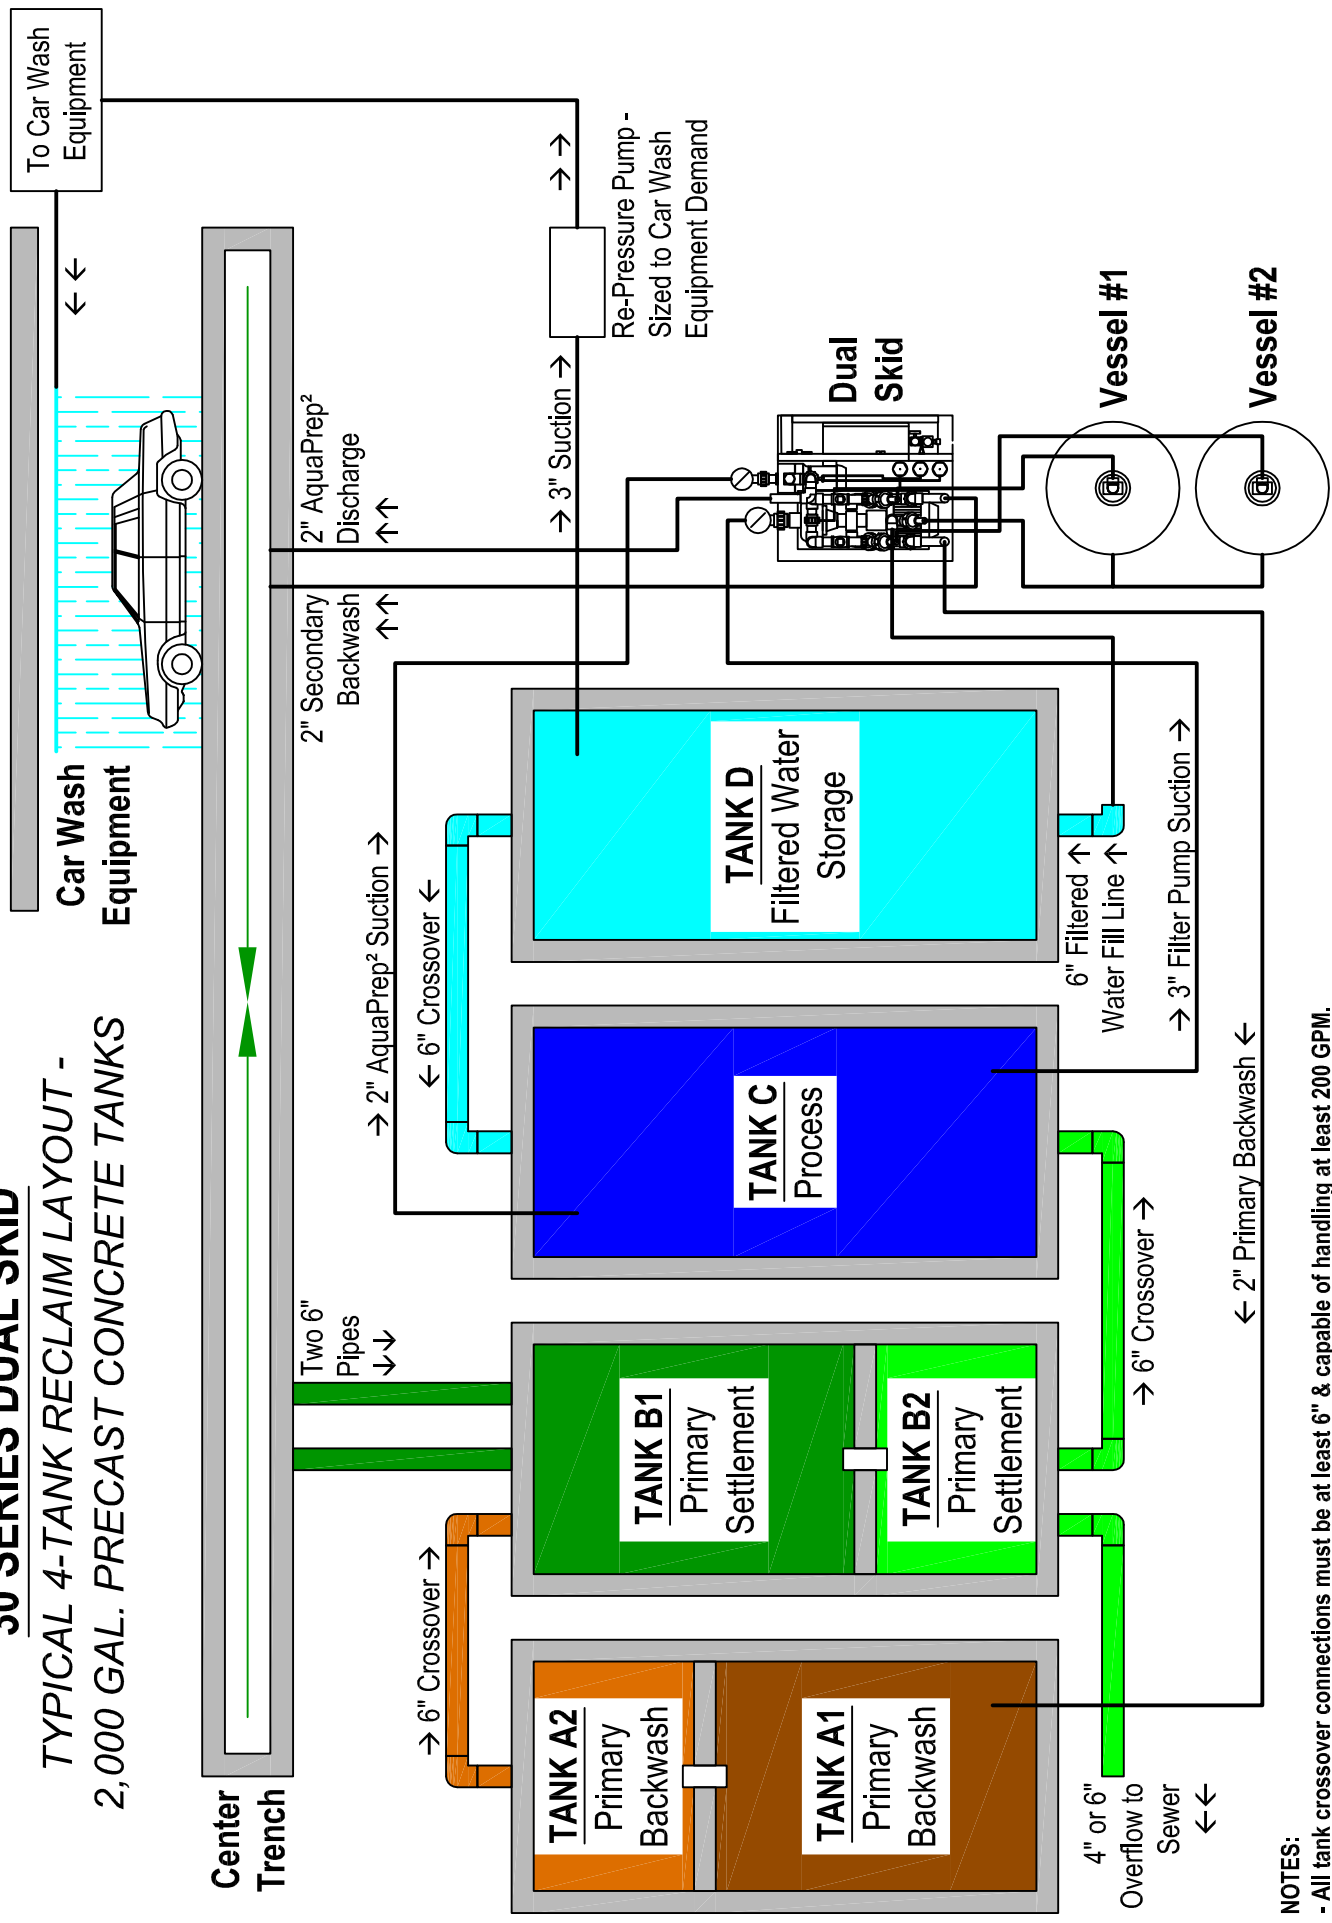